

TRANSMITTAL LETTER TO THE UNITED STATES
DESIGNATED/ELECTED OFFICE (DO/EO/US)
CONCERNING A FILING UNDER 35 U.S.C. 371

P-6107

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR

09/720514

INTERNATIONAL APPLICATION NO.

PCT/FR99/01505

INTERNATIONAL FILING DATE

June 23, 1999

PRIORITY DATE CLAIMED

June 26, 1998

TITLE OF INVENTION

METHOD AND DEVICE FOR SELECTING PARAMETERS IN A CELLULAR RADIO COMMUNICATION NETWORK

APPLICANT(S) FOR DO/EO/US

Thierry BILLON


Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☐ This is an express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).
4. ☒ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. ☒ A copy of the International Application as filed (35 U.S.C. 371 (c) (2))
 - a. ☒ is transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ has been transmitted by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
- ☒ A translation of the International Application into English (35 U.S.C. 371(c)(2)).
- ☒ A copy of the International Search Report (PCT/ISA/210).
- ☐ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371 (c)(3))
 - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ have been transmitted by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☐ have not been made and will not be made.
- ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
- ☐ An oath or declaration of the inventor(s) (35 U.S.C. 371 (c)(4)).
- ☒ A copy of the International Preliminary Examination Report (PCT/IPEA/409).
- ☒ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371 (c)(5)).

Items 13 to 18 below concern document(s) or information included:

13. ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
14. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
15. ☒ A **FIRST** preliminary amendment.
 - A **SECOND** or **SUBSEQUENT** preliminary amendment.
16. ☐ A substitute specification.
17. ☐ A change of power of attorney and/or address letter.
18. ☐ Certificate of Mailing by Express Mail
19. ☒ Other items or information:

Verification of English Translation
PCT Request Form PCT/RO/101
4 Sheets of Formal Drawings
Return Receipt Postcard

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR 09/720514)		INTERNATIONAL APPLICATION NO. PCT/FR99/01505		ATTORNEY'S DOCKET NUMBER P-6107	
20. The following fees are submitted:				CALCULATIONS PTO USE ONLY	
BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)) : <input checked="" type="checkbox"/> Search Report has been prepared by the EPO or JPO \$%0.00 <input type="checkbox"/> International preliminary examination fee paid to USPTO (37 CFR 1.482) \$720.00 <input type="checkbox"/> No international preliminary examination fee paid to USPTO (37 CFR 1.482) but international search fee paid to USPTO (37 CFR 1.445(a)(2)) \$790.00 <input type="checkbox"/> Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO \$1,070.00 <input type="checkbox"/> International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(2)-(4) \$98.00					
ENTER APPROPRIATE BASIC FEE AMOUNT =				\$860.00	
Surcharge of \$130.00 for furnishing the oath or declaration later than months from the earliest claimed priority date (37 CFR 1.492 (e)). <input type="checkbox"/> 20 <input type="checkbox"/> 30				\$0.00	
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE		
Total claims	36 - 20 =	16	x \$18.00	\$288.00	
Independent claims	2 - 3 =	0	x \$80.00	\$0.00	
Multiple Dependent Claims (check if applicable). <input type="checkbox"/>				\$0.00	
TOTAL OF ABOVE CALCULATIONS =				\$1,148.00	
Reduction of 1/2 for filing by small entity, if applicable. Verified Small Entity Statement must also be filed (Note 37 CFR 1.9, 1.27, 1.28) (check if applicable). <input type="checkbox"/>				\$0.00	
SUBTOTAL =				\$1,148.00	
Processing fee of \$130.00 for furnishing the English translation later than months from the earliest claimed priority date (37 CFR 1.492 (f)). <input type="checkbox"/> 20 <input type="checkbox"/> 30				\$0.00	
TOTAL NATIONAL FEE =				\$1,148.00	
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31) (check if applicable). <input type="checkbox"/>				\$0.00	
TOTAL FEES ENCLOSED =				\$1,148.00	
				Amount to be: refunded	\$
				charged	\$
<input checked="" type="checkbox"/> A check in the amount of \$1,148.00 to cover the above fees is enclosed. <input type="checkbox"/> Please charge my Deposit Account No. _____ in the amount of _____ to cover the above fees. A duplicate copy of this sheet is enclosed. <input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge any fees which may be required, or credit any overpayment to Deposit Account No. 18-2284 A duplicate copy of this sheet is enclosed.					
NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.					
SEND ALL CORRESPONDENCE TO:					
<div style="display: flex; justify-content: space-between;"> <div style="width: 45%;"> Michael L. Kenaga PIPER MARBURY RUDNICK & WOLFE P.O. Box 64807 Chicago, Illinois, 60664-0807 (312) 368-4000 </div> <div style="width: 50%; text-align: right;">  SIGNATURE Michael L. Kenaga NAME 34,639 REGISTRATION NUMBER <u>December 21, 2000</u> DATE </div> </div>					

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re application of BILLON)
)
U.S. patent application)
(U.S. National Phase of PCT/FR99/01505)
filed on June 23, 1999)
corr. to French applic. No.98 08150)

For : " METHOD AND DEVICE FOR SELECTING PARAMETERS IN A
CELLULAR RADIO COMMUNICATION NETWORK "

PRELIMINARY AMENDMENT

To Honorable Commissioner of Patents and Trademarks
Washington, D.C. 20231

S I R:

Prior to examination, please amend the above-
identified application as follows:

IN THE TITLE:

Please cancel the title as translated in the front page of
the PCT publication,n and substitute therefor: -- METHOD
AND APPARATUS FOR SELECTING PARAMETERS IN A CELLULAR RADIO
COMMUNICATION NETWORK --

IN THE SPECIFICATION:

Page 1, between lines 2 and 3, insert the heading
-- BACKGROUND OF THE INVENTION --.

Page 3, between lines 13 and 14, insert the heading
-- SUMMARY OF THE INVENTION --.

Page 5, delete lines 23-26.

Page 5, before line 27, insert the heading -- BRIEF
DESCRIPTION OF THE DRAWINGS --.

Page 6, between lines 7 and 8, insert the heading
-- DESCRIPTION OF PREFERRED EMBODIMENTS --.

IN THE ABSTRACT:

Please cancel the abstract as printed in the front page of
the PCT publication, and insert the Abstract of the
Disclosure as submitted in the appended sheet.

IN THE CLAIMS:

Please amend Claims 1-7 and 9-19 of the application as
follows:

05720564-0000004

-- 1 (Amended). A method of selecting the value of at least one radio resource management parameter $[(S_{PC}, S_{HO}, S_1, S_2, S_3, S_{TS})]$ employed by base station control units [(4)] of a cellular radio communications network, wherein, for each base station [(1)] serving mobile stations [(3)] in a cell, values are obtained of at least one quantity $[(RXLEV, RXQUAL, DISTANCE, CIR)]$ based on measurements made on radio channels in the cell, said quantity being compared to at least one associated parameter in a procedure for managing the radio resources allocated to the mobile stations, [characterised in that] the method comprising the steps of:

- maintaining a statistic [is maintained] of the values obtained for said quantity, and [in that]
- adapting the value of said associated parameter [is adapted] for the cell in such a way that, according to the statistic, a determined fraction of the values obtained of said quantity are greater than the value of the associated parameter.

2 (Amended). A method according to Claim 1, wherein said measurements on radio channels in the cell comprise measurements of [the] a reception level $[(RXLEV)]$ of radio signals transmitted in at least one direction between the base station [(1)] and mobile stations [(3)].

3 (Amended). A method according to [any one of the preceding claims] claim 1, wherein said measurements made on radio channels in the cell comprise quality measurements $[(RXQUAL)]$ of the reception of radio signals transmitted in at least one direction between the base station [(1)] and mobile stations [(3)].

4 (Amended). A method according to [any one of the preceding claims] claim 1, wherein the obtaining of said quantity comprises estimating a channel-to-interferer ratio [(CIR)] at the base station [(1)] or at each mobile station [(3)].

5 (Amended). A method according to [any one of the preceding claims] claim 1, wherein said measurements are made by the mobile stations [(3)].

6 (Amended). A method according to [Claims 4 and 5,] claim 4, wherein said measurements are made by the mobile stations, and wherein the estimation of a channel-to-interferer ratio [(CIR)] at a mobile station comprises a comparison between [the] a reception level [(RXLEV DL)], by the mobile station [(3)], of a signal transmitted by the base station [(1)] and [the] reception levels [(RXLEV NCELL(n))], by the same mobile station, of signals transmitted on beacon frequencies by the respective base stations of a set of adjacent cells.

7 (Amended). A method according to Claim 6, wherein said quantity [(CIR)] is [the] a ratio between the level of reception [(RXLEV DL)] of said signal transmitted by the base station [(1)] and a sum of the reception levels [(RXLEV NCELL(n)) of the signals transmitted on the beacon frequencies by the base stations of the adjacent cells.

9 (Amended). A method according to [any one of Claims 1 to 4] claim 1, wherein said measurements made on radio channels in the cell comprise measurements of a reception delay, by the base station [(1)], of signals transmitted by mobile stations [(3)].

10 (Amended). A method according to [any one of the preceding claims] claim 1, wherein the statistic of the values obtained of said quantity [(RXLEV, RXQUAL, DISTANCE, CIR)] is based on first measurements obtained on a dedicated signalling channel [(SDCCH)] for each mobile station [(3)] spontaneously accessing the cell.

11 (Amended). A method according to [any one of the preceding claims] claim 1, wherein said quantity is compared with an associated parameter [(S_{PC})] in a control procedure of the power transmitted on radio channels allocated to communications between the base station [(1)] and mobile stations [(3)].

12 (Amended). A method according to Claim 11, wherein the power control procedure is such that only the mobile stations for which the value obtained of said quantity is greater than the selected value of a first associated parameter [(S_{PC})] can be subjected to power limitation, and wherein said determined fraction is of 10 to 20 % for the adaptation of the first parameter [(S_{PC})].

13 (Amended). A method according to Claim 12, wherein said quantity is further compared to a second associated parameter [(S_{HO})] in an inter-cell handover procedure, wherein the handover procedure is such that the mobile stations [(3)] for which the value obtained of said quantity is [greater] lower than the selected value of the second associated parameter are subjected to inter-cell handover, and wherein said determined fraction is lower for the adaptation of the second parameter [(S_{HO})] than for the adaptation of the first parameter [(S_{PC})].

14 (Amended). A method according to [any one of the preceding claims] claim 1, wherein said quantity is compared to at least one associated parameter $[(S_1 - S_3, S_{TS})]$ in a selection procedure for radio channels allocated to communications between the base station and the mobile stations.

15 (Amended). A method according to Claim 14, wherein the base station comprises a number M of transceiver units $[(TRX1 - TRX4)]$, one of which transmits on a beacon frequency, and wherein the radio channel selection procedure preferentially allocates channels on the beacon frequency to the mobile stations $[(3)]$ for which the values obtained for said quantity are lower than an associated parameter $[(S_1)]$, the adaptation of which makes use of a determined fraction of the form $100/M \%$.

16 (Amended). A method according to Claim 14, wherein the base station comprises a number M of transceiver units $[(TRX1 - TRX4)]$, and wherein the radio channel selection procedure distributes the channels allocated to the mobile stations $[(3)]$ based on comparisons between the values obtained of said quantity for said mobile stations and $M-1$ associated parameters $[(S_1 - S_3)]$, the adaptation of which makes use of the respective determined fractions of the form $100 \times m/M \%$ for $1 \leq m \leq M-1$.

17 (Amended). A method according to [any one of the preceding claims] claim 1, wherein said quantity is compared to an associated parameter $[(S_{HO})]$ in an inter-cell or intra-cell handover procedure.

18 (Amended). A method according to [any one of the preceding claims] claim 1, wherein the base station [(1)] comprises a plurality of transceiver units [(TRX1-TRX4)], and wherein the statistic for the values obtained for said quantity is maintained separately for each one of the transceiver units, in order to select independently the values of the associated parameter [(S_{TS})] for the different transceiver units, at least part of the radio resource management procedure being carried out for each one of the transceiver units.

19 (Amended). A control unit for at least one base station [(1)] of a cellular radio communications network, comprising means [(6)] for performing management procedures of radio resources allocated to communications between the base station and mobile stations [(3)] in a cell served by said base station, [characterised by] and means [(10,11)] for selecting [, in accordance with a selection method according to any one of the preceding claims, the] a value of at least one parameter [(S_{PC}, S_{HO}, S₁, S₂, S₃, S_{TS})] used in at least one of said procedures in which values of a quantity [(RXLEV, RXQUAL, DISTANCE, CIR)] obtained from measurements made in the cell on radio channels between the base station and the mobile stations are compared with said parameter, wherein the selection means [(10,11) being] are arranged to maintain a statistic of the values obtained of said quantity, and to adapt the value of said parameter in such a way that, based on the statistic, a determined fraction of the values obtained of said quantity are greater than the value of the associated parameter. --

Please insert the following claims 20-36:

-- 20. A control unit according to Claim 19, wherein said measurements on radio channels in the cell comprise measurements of a reception level of radio signals transmitted in at least one direction between the base station and mobile stations.

21. A control unit according to claim 19, wherein said measurements made on radio channels in the cell comprise quality measurements of the reception of radio signals transmitted in at least one direction between the base station and mobile stations.

22. A control unit according to claim 19, wherein said quantity is obtained from an estimation of a channel-to-interferer ratio at the base station or at each mobile station.

23. A control unit according to claim 19, wherein said measurements are made by the mobile stations.

24. A control unit according to Claim 22, wherein said measurements are made by the mobile stations, and wherein the estimation of a channel-to-interferer ratio at a mobile station comprises a comparison between a reception level, by the mobile station, of a signal transmitted by the base station and reception levels, by the same mobile station, of signals transmitted on beacon frequencies by the respective base stations of a set of adjacent cells.

25. A control unit according to Claim 24, wherein said quantity is a ratio between the level of reception of said signal transmitted by the base station and a sum of the reception levels of the signals transmitted on the beacon frequencies by the base stations of the adjacent cells.

26. A control unit according to Claim 25, wherein said sum is weighted as a function of colours of the adjacent cells in frequency reuse patterns of the network.

27. A control unit according to claim 19, wherein said measurements made on radio channels in the cell comprise measurements of a reception delay, by the base station, of signals transmitted by mobile stations.

28. A control unit according to claim 19, wherein the statistic of the values obtained of said quantity is based on first measurements obtained on a dedicated signalling channel for each mobile station spontaneously accessing the cell.

29. A control unit according to claim 19, wherein said quantity is compared with an associated parameter in a control procedure of the power transmitted on radio channels allocated to communications between the base station and mobile stations.

30. A control unit according to Claim 29, wherein the power control procedure is such that only the mobile stations for which the value obtained of said quantity is greater than the selected value of a first associated parameter can be subjected to power limitation, and wherein said determined fraction is of 10 to 20 % for the adaptation of the first parameter.

31. A control unit according to Claim 30, wherein said quantity is further compared to a second associated parameter in an inter-cell handover procedure, wherein the handover procedure is such that the mobile stations for which the value obtained of said quantity is greater than the selected value of the second associated parameter are subjected to inter-cell handover, and wherein said determined fraction is lower for the adaptation of the second parameter than for the adaptation of the first parameter.

32. A control unit according to claim 19, wherein said quantity is compared to at least one associated parameter in a selection procedure for radio channels allocated to communications between the base station and the mobile stations.

33. A control unit according to Claim 32, wherein the base station comprises a number M of transceiver units, one of which transmits on a beacon frequency, and wherein the radio channel selection procedure preferentially allocates channels on the beacon frequency to the mobile stations for which the values obtained for said quantity are lower than an associated parameter, the adaptation of which makes use of a determined fraction of the form $100/M \%$.

34. A control unit according to Claim 32, wherein the base station comprises a number M of transceiver units, and wherein the radio channel selection procedure distributes the channels allocated to the mobile stations based on comparisons between the values obtained of said quantity for said mobile stations and M-1 associated parameters, the adaptation of which makes use of the respective

determined fractions of the form $100 \times m/M \%$ for $1 \leq m \leq M-1$.

35. A control unit according to claim 19, wherein said quantity is compared to an associated parameter in an inter-cell or intra-cell handover procedure.

36. A control unit according to claim 19, wherein the base station comprises a plurality of transceiver units, and wherein the statistic for the values obtained for said quantity is maintained separately for each one of the transceiver units, in order to select independently the values of the associated parameter for the different transceiver units, at least part of the radio resource management procedure being carried out for each one of the transceiver units. --

A B S T R A C T O F T H E D I S C L O S U R E

For each base station serving mobile stations in a cell, measurements carried out on radio channels in the cell are used to obtain values of a quantity compared to one or several associated parameters in a procedure managing radio resources allocated to the mobile stations. A statistic of the obtained values the quantity is maintained. The value of each associated parameter for the cell is adapted such that, according to the statistic, a predetermined fraction of the values of the quantity obtained from the measurements are higher than the associated parameter value.

REMARKS

Entry of the above amendment is respectfully requested.

Respectfully submitted,

PIPER MARBURY RUDNICK & WOLFE

Date: December 21, 2000 By: Michael L. Kenaga
Michael L. Kenaga
Reg. No. 34,639

PIPER MARBURY RUDNICK & WOLFE

P.O. Box 64807

Chicago, IL 60664-0807

(312) 368-4000

103220-152230

METHOD AND APPARATUS FOR SELECTING PARAMETERS
IN A CELLULAR RADIO COMMUNICATION NETWORK

The invention relates to the management of the radio resources used in cellular mobile radio communication
5 networks.

Cellular networks comprise base stations to serve the mobile stations located in the different cells. Each base station has a limited range, and is allocated only one part of the radio resources made available to the network
10 operator. These resources are reused in other cells to optimise the communication capacity offered by the network. This reuse results in a risk of interference between distinct communications sharing the same resources.

15 Various radio resource management procedures can be applied, depending on the operator's choice, in the infrastructure of the cellular network in order to optimise the use of the frequencies and to minimise interference. The following may be cited:

- 20 - power control procedures which limit the transmitted radio power when the propagation conditions between a base station and a mobile station are relatively good;
- 25 - resource allocation procedures within each cell, which may follow various "tiering" strategies for limiting interference or allowing for greater reuse of certain channels;
- 30 - automatic channel transfer procedures within the same cell (intra-cell handover), which change the channels allocated to communications undergoing interference;
- 35 - automatic transfer procedures between cells when communication is in progress (inter-cell handover), which provide the continuity of communication when a mobile terminal moves and changes cell;

- frequency-hopping procedures which provide frequency diversity of the interferers;
 - dynamic channel allocation procedures, by means of which the sets of frequencies employed in the cells
- 5 can be adapted to the interference conditions or the traffic conditions observed; etc.

A good number of these procedures call upon parameters which are compared to quantities measured by the base stations or the mobile stations in order to take

10 decisions or determine a command.

For example, in the case of power control, the attenuation applied is an increasing function of the power level sensed on the radio link, a comparison parameter serving to characterise this increase and/or to set a

15 power threshold below which no attenuation is imposed. In general, the inter-cell handover algorithms also use a power threshold below which they force a change of the attachment cell of the mobile station.

To optimise the whole arrangement, the network

20 operator must, cell by cell, set suitable values for those management parameters, which raises a number of difficulties:

- the number of applied procedures and cells, and hence the number of parameters to be set, can be
- 25 high, which often leads to adopting default values which are not well-suited to the local characteristics of the network;
- the choice of a parameter is not always intuitive, which also favours the adoption of default values;
- 30 - an empirical choice, even by a highly experienced installer, may turn out to be poorly suited due to the complexity of the radio propagation mechanisms;
- the relevance of the choice of a parameter is often highly sensitive to the choices made in the
- 35 adjacent cells, or for other parameters of the same procedure or of different procedures;
- when the radio environment is modified (addition, suppression, or breakdown of a base station or

simply of a transceiver unit, ongoing change in the propagation conditions in the vicinity of a base station, etc.), the choice of parameters should be revised in the cell concerned, or even in a number of adjacent cells. In practice, this is generally not done due to the complexity of the task.

An object of the present invention is to overcome at least some of the difficulties described heretofore. Another object is to simplify the choice of values for the radio resource management parameters used in the infrastructure of a cellular network. Another object is to render such a choice better adapted to the local characteristics of the cells.

The invention thus proposes a method of selecting the value of at least one radio resource management parameter employed by base station control units of a cellular radio communications network. For each base station serving mobile stations in a cell, values are obtained of at least one quantity based on measurements made on radio channels in the cell, this quantity being compared to at least one associated parameter in a procedure for managing the radio resources allocated to the mobile stations. According to the invention, a statistic is maintained of the values obtained for said quantity, and the value of said associated parameter is adapted for the cell in such a way that, according to the statistic, a determined fraction of the values obtained of said quantity are greater than the value of the associated parameter.

By means of the statistical distributions of the quantities deduced from the measurements, the method "learns" characteristics of the network, which may be pertinent in respect of one or more radio resource management procedures. Defining in relation to this distribution the values of parameters of these procedures, e.g. comparison thresholds, greatly simplifies the operator's parametering task.

Definition by means of a predetermined fraction of the values taken into account in the statistics will often

be more intuitive than the direct choice of an absolute value of the parameter.

For example, in the case of power control, it is known that it is desirable not to impose attenuation on 5 10% or 20% of the calls experiencing the worst reception conditions. The quantity forming the object of the statistic may therefore be the power level, or, more generally, a quantity correlated to the channel-to-interferer ratio, and for the power control a threshold 10 will be adopted which corresponds to 10% or 20% of the worst values of this quantity.

Adaptations of the same type may also be effected for parameters involved in the handover procedures, the procedures for selecting the radio channels allocated to 15 communications, etc.

The quantities subjected the statistic can be determined on the basis of measured power or quality levels, or of estimates of the channel-to-interferer ratio, downlink (from the base stations to the mobile 20 stations) and/or uplink. The quantity may likewise depend on the distance between the base station and the mobile station, evaluated on the basis of the propagation delay of certain signals.

To improve the uplink reception quality, the 25 manufacturers of cellular network infrastructures have conceived a certain number of methods based on diversity or signal processing techniques. These techniques cannot in general be used at the level of the mobile stations. The present invention allows for an improvement in both 30 directions of communication. Depending on the situation, the improvement may be greater in the uplink or in the downlink. Taking account of the methods already available for improving the uplink reception, it may be advantageous to give priority to the downlink in the implementation of 35 the present invention. To achieve this, the measurements used to obtain the quantity subjected to the statistic, on the basis of which the value of the parameter is determined, will preferably be the measurements made by

the mobile stations.

For certain procedures, particularly for inter-cell handover procedures, it is judicious for the statistic of the values obtained for the quantity deduced from the measurements to relate to the first measurements obtained on a dedicated signalling channel for each mobile station spontaneously accessing the cell. This allows the statistic to provide a faithful reflection of the radio coverage of the cell, while avoiding to take account of the measurements relating to the mobile stations of which the access to the cell, or the persistence in the cell, would not be spontaneous but would result from an artificial handover or other procedure.

Another aspect of the present invention relates to a control unit for at least one base station of a cellular radio communications network, comprising means for performing management procedures of radio resources allocated to communications between the base station and mobile stations in a cell served by said base station, and means for selecting, in accordance with a selection method as defined hereabove, the value of at least one parameter used in at least one of these procedures.

Other features and advantages of the present invention will be disclosed in the description hereinafter of non-limitative embodiments, in reference to the appended drawings, in which:

- Figure 1 is a schematic representation of the access system to a cellular radio network;
- Figure 2 is a graph showing an example of the distribution function of a measured power level, and illustrating its exploitation in power control and handover procedures;
- Figure 3 is a schematic representation of a cell in which a particular procedure for choice of allocated radio channels has been applied;
- Figure 4 is a graph similar to that of Figure 2, illustrating the determination of the thresholds used in the procedure applied in the cell of Figure

3;

- Figure 5 is a diagram illustrating another procedure for the choice of channel allocation; and
- Figures 6 and 7 are graphs showing the improvement in reception in the uplink and downlink, obtained by applying the invention to a procedure of choice of allocated radio channels.

The infrastructure of a cellular network such as that represented in Figure 1 comprises base stations (BTS) 1, 2, distributed over the geographical cover area of the network. The base stations procure radio links with the mobile stations (MS) 3, which are located within their range. They are also linked to an access system comprising base station controllers (BSC) 4 and mobile service switching centres (MSC) 5, which provide the interface with the fixed networks. Each BTS 1 depends on a BSC 4, but each BSC may supervise several BTS. For each BTS 1 which it supervises, the BSC 4 comprises a control software module 6, which carries out a certain number of radio resource management procedures for the cell served by this BTS.

The method according to the invention is described hereinafter in relation to the base station 1. It is understood that this may also be applied in a similar manner for each of the other base stations 2. In schematic manner, the contour 7 drawn in Figure 1 designates the limit of the cell served by the BTS 1. Beyond this limit, it is an adjacent BTS 2 which serves the mobile stations.

The mobile stations 3 active within the cell periodically carry out measurements on the radio signals emitted by the BTS 1 on the downlink channels. These measurements are effected on a beacon frequency assigned to the cell when the mobile is not in communication, or on the traffic or signalling channels. In addition, when a mobile station communicates with the BTS, the latter effects measurements on the signals which it receives.

In the specific case of GSM networks, which will be considered hereinafter by way of example, the measurements

effected are described in Recommendation GSM 05.08 published by the ETSI (European Telecommunications Standards Institute), to which reference may be made. These measurements include:

- 5 - the downlink power level sensed by the mobile 3, averaged by periods of 480 ms and coded on 6 bits by a quantity RXLEV_DL. The values of RXLEV_DL are increased by one unit per decibel of the measured power P (RXLEV_DL = 0 if $P < -103$ dBm, RXLEV_DL = 1 if $-103 \leq P < -102$ dBm, ..., RXLEV_DL = 63 if $P \geq -41$ dBm);
- 10 - the downlink quality level, coded on 3 bits by a quantity RXQUAL_DL calculated on the basis of estimates of the bit error rate (BER) observed on the downlink by means of the channel equaliser or of the convolutional decoder of the mobile 3 (RXQUAL_DL = 0 if $BER < 0.2\%$, RXQUAL_DL = 1 if $0.2\% < BER < 0.4\%$, RXQUAL_DL = 2 if $0.4\% < BER < 0.8\%$, RXQUAL_DL = 3 if $0.8\% < BER < 1.6\%$, RXQUAL_DL = 4 if $1.6\% < BER < 3.2\%$, RXQUAL_DL = 5 if $3.2\% < BER < 6.4\%$, RXQUAL_DL = 6 if $6.4\% < BER < 12.8\%$, RXQUAL_DL = 7 if $BER > 12.8\%$);
- 15 - the uplink power and quality levels measured by the BTS 1, and coded by two quantities RXLEV_UL and RXQUAL_UL defined in the same manner as for the corresponding downlink quantities RXLEV_DL and RXQUAL_DL;
- 20 - power levels which the mobile stations 3 sense from other BTS 2 on the beacon frequencies assigned to the adjacent cells. Each of these levels is coded on six bits by a quantity RXLEV_NCELL(n) in the same manner as for the quantity RXLEV_DL;
- 25 - a distance (in the meaning of radio propagation) between the BTS and the mobile station, which the BTS 1 evaluates on the basis of the reception delay of the radio signal sent by the mobile 3 with respect to the signal transmission by the BTS.
- 30
- 35

The measurements made by the mobile station 3 are transmitted on the radio interface in a message called MEASUREMENT_REPORT. The BTS 1 retransmits these measurements to the BSC 4 in a message called

5 MEASUREMENT_RESULT, appending the measurements which it has made itself. The whole of these measurements is exploited by the BSC 4 in the context of the radio resource management procedures used in the cell.

According to the invention, at least part of these

10 measurements are also supplied to a statistical calculation module 10, which analyses the occurrence frequencies of the different possible values of one or several quantities which depend on it.

In the exemplary architecture shown in Figure 1, the

15 statistical calculation module 10 is located in the BSC 4, and intercepts the MEASUREMENT_RESULT messages transmitted on the interface (A-bis) between BTS 1 and BSC 4. The BSC comprises another module 11, which carries out the adaptation of the different parameters used by the module

20 6 supervising the BTS 1, with the aid of the statistics maintained by the module 10. Alternatively, the modules 10 and/or 11 could be located in the base stations.

The GSM systems combine frequency division multiple access (FDMA) and time division multiple access (TDMA).

25 One of the timeslots in each frame on the beacon frequency of each base station is used to provide a control channel (BCCH). The other timeslots can be allocated as traffic channels. The BTS is generally provided with other frequencies to provide traffic channels. To access the

30 network, a mobile which is active in the cell issues an access request on a random access channel (RACH) associated with the BCCH, after which the base station allocates to it a dedicated bidirectional signalling channel (SDCCH) on which various signalling elements are

35 exchanged.

The measurements referred to heretofore are made by the base station 1 and the mobile stations 3 as soon as a dedicated signalling channel is allocated. Advantageously,

00720544.022301

the measurements, on the basis of which the module 10 makes the statistical calculations, are limited to the first measurements obtained on the SDCCH channel for each mobile station spontaneously accessing the cell. This
5 procures a limited number of measurement samples, but these provide a good representation of the effective radio coverage within the cell. Indeed, it avoids the statistics being influenced by the effects of the handover algorithms applied in the cell or in adjacent cells.

10 The module 10 calculates the distribution function of one or more quantities obtained on the basis of the measurement results. The curve in Figures 2 and 4 shows an example of the distribution function thus calculated, in the case where the quantity in question is the quantity
15 RXLEV representing a sensed power level (RXLEV_UL, RXLEV_DL, or a combination of the two). The value $f(\text{RXLEV})$ of the distribution function, for a certain value RXLEV, represents the probability of observation of a value at most equal to RXLEV among the values deduced from the
20 measurements actually made. The curve obtained by derivation represents the probability density of the quantity.

In order to obtain a distribution function such as that represented in Figures 2 and 4, a simple count is
25 made of the values derived from the measurements.

The module 10 has, for example, a counter $N(x)$ for each possible value x of the quantity being analyzed. If a measurement sample gives a value y , it increments by one
unit the counters $N(x)$ with $x \geq y$. The distribution
30 function is given by $f(x) = N(x)/N(x_{\max})$, where x_{\max} is the highest possible value of x . When $N(x_{\max})$ attains a certain overflow value, the module 10 divides all the counters $N(x)$ by a renormalisation factor. The overflow value and the renormalisation factor are chosen as a function of the
35 period which it is intended should be taken into account in the statistic.

The module 10 could also calculate the probability

density with occurrence counters for each value, and to deduce from this the distribution function.

Curves of the type represented in Figures 2 and 4 are used by the module 11 to adaptatively determine the thresholds used in certain radio resource management procedures.

For example, the control module 6 of the BSC can apply, for communications involving its BTS 1, a power control algorithm using the following recursive formula to determine the attenuation which should be applied in successive time windows:

$$\text{TXPWR}_n = \max\{0, k \times (\text{RXLEVAV}_{n-1} + \text{TXPWR}_{n-1} - S_{PC})\} \quad (1)$$

where:

TXPWR_n is the attenuation factor, expressed in dB with respect to the maximum power, used in the uplink and/or in the downlink in the n-th time window;

k is a compensation factor between 0 (no power control) and 1;

RXLEVAV_{n-1} is the value of a power level RXLEV averaged on the (n-1)-th time window, expressed in dBm or in RXLEV units;

S_{PC} is a threshold expressed in the same units as the quantity RXLEVAV_{n-1} .

In the expression (1), $\text{RXLEV}_0 = \text{RXLEVAV}_{n-1} + \text{TXPWR}_{n-1}$ represents the field strength which would have been received in the absence of power control. At each iteration of the algorithm, i.e. after each averaging window, the attenuation is recalculated. Under stable conditions, the attenuation factor is equal to $k \times (\text{RXLEV}_0 - S_{PC})$ if $\text{RXLEV}_0 \geq S_{PC}$, and equal to 0 dB if $\text{RXLEV}_0 \leq S_{PC}$. This calculation can be carried out separately for the uplink (averaging RXLEV_{UL}) and for the downlink (averaging RXLEV_{DL}).

It is known empirically that this power control algorithm is optimum when only about 20% of the

communications are at maximum power, i.e. when the 80% of the best communications are the object of a power limitation forced by the algorithm ($TXPWR > 0$ dB). In general, the maximum power is required for communications with the mobiles furthest away from the base station, for which the received field is the weakest (the mobiles located between the contours 7 and 8 in the schematic representation of Figure 1). These are approximately the 20% worst cases in the statistic for radio-electric coverage of the cell.

The threshold S_{PC} from the expression (1) can therefore be defined on the basis of the distribution function $f(RXLEV)$, as indicated in Figure 2. This is the value for which the distribution function is valued at 0.2 ($S_{PC} = 28$ in the example of Figure 2, hence a power of -75 dBm). In practice, the threshold S_{PC} may in general be chosen in the range $10\% \leq f(S_{PC}) \leq 20\%$.

The handover algorithms executed by the BSC use a number of thresholds which may be adapted in a similar manner.

For example, too low a field strength is generally a cause of handover. If the parameter $RXLEV_DL$ or $RXLEV_UL$ measured in the course of communication falls below a threshold S_{HO} , the BTS issues a command to the mobile station to change cell, generally for connection to the adjacent cell for which the sensed power level $RXLEV_NCELL(n)$ is the highest.

It is judicious for the threshold S_{HO} to be smaller than the threshold S_{PC} , in order to avoid the forcing of handovers due to insufficient power in the case of mobiles which would not be at maximum power. In the example of Figure 2, the threshold S_{HO} is chosen by the module 11 as corresponding to the value of $RXLEV$ such that $f(RXLEV) = 10\%$ ($S_{HO} = 19$, hence a power of -84 dBm).

The choices of the parameters S_{PC}, S_{HO}, \dots are modified automatically by the modules 10 and 11 when certain

modifications occur in the radio environment, including the situation of a new neighbouring base station being added. The adaptation produces new values after convergence of the statistic.

5 The statistics effected by the module 10 can likewise be used in the context of procedures for selecting the channels which are to be allocated to communications being established.

10 By way of example, certain operators adopt strategies of the "concentric cell" type, according to which the FDMA frequencies are allocated to communications in a manner which depends on the signal strength.

15 Figure 3 provides an illustration of this in a specific case. In this schematic example, BTS 1 comprises M=4 transceiver units TRX1-TRX4, associated respectively with different carrier frequencies. The unit TRX1 is associated with the beacon frequency and functions at maximum power without frequency hopping to ensure the required coverage. The other units TRX2-TRX4 are used for
20 traffic channels, and they are allocated frequency numbers (ARFCN in the GSM terminology) if there is no frequency hopping, or identification numbers of a hopping sequence (MAIO).

25 The purpose of the unit TRX4 is to transmit at the weakest power, i.e. preferably for mobiles which are located in the area delimited schematically by the circle C4 in Figure 3. The unit TRX3 preferably transmits at slightly higher power, a priori for mobiles which are located in the area delimited schematically by the circles
30 C4 and C3. The unit TRX2 preferably transmits at a still higher power, a priori for mobile stations located in the area delimited schematically by the circles C3 and C2. The unit TRX1, functioning on the beacon frequency at maximum power, serves a priori for the "worst" mobiles
35 (between the circles C2 and C1). In practice, it is clear that the preferential service areas for the TRXm units are not circular.

This type of allocation strategy allows for the reuse

of frequencies to be optimised, adopting a reuse pattern which is the smaller for a given frequency, the weaker the transmission power is on this frequency.

In order to decide to allocate a given communication
5 frequency to a mobile station, or a given transceiver unit TRX_m, one possibility is to compare the power level RXLEV detected by the mobile from the base station (or by the base station from the mobile, or a combination of the two) with decision thresholds S_1, S_2, S_3 defined by the module 11
10 on the basis of the distribution function determined by the calculation module 10.

Figure 4 illustrates this determination of the thresholds S_1, S_2, S_3 , which correspond respectively to the values 25%, 50%, and 75% of the distribution function
15 ($S_1 = 31$, $S_2 = 42$, and $S_3 = 50$ in the example represented, that is respectively -72 dBm, -61 dBm, and -53 dBm). For each mobile to which a channel is to be allocated, if $RXLEV < S_1$ (25% worst cases), the beacon frequency (unit TRX1) will be retained, because the power will be maximum
20 if an available timeslot remains on this frequency. If all the timeslot are occupied by the unit TRX1, the algorithm will search to determine whether a timeslot is available on the unit TRX2, then on the unit TRX3, and so on. If $S_1 \leq RXLEV < S_2$, the frequency of the unit TRX2 will
25 be allocated for preference. If $S_2 \leq RXLEV < S_3$, the frequency of the unit TRX3 will be allocated for preference. And if $RXLEV \geq S_3$ (25% best cases), the frequency of the unit TRX4 will be allocated for preference.

30 In the general case of a BTS with M transceiver units, each threshold S_m ($1 \leq m \leq M-1$) is defined on the basis of a fraction of the form $100 \times m/M$ % in the foregoing procedure, i.e. $f(S_m) = 100 \times m/M$ %.

In the case of failure of a TRX_m unit, the relevant

thresholds S_m are easily modified. It is sufficient to reduce the number M by one unit for the module 11, after convergence of the statistics, to select new adequate values.

5 This communication channel selection strategy can have numerous variants.

In one of these, two reuse patterns only are used; one for the beacon frequencies and the other, smaller in size, for the other frequencies. In other words, only the
10 threshold S_1 (with $f(S_1) = 100/M \%$) is used to decide whether a mobile will communicate on the beacon frequency (unit TRX1) or on another frequency in each cell (unit TRXm, with $2 \leq m \leq M$).

As with the previous technique, this procedure for
15 selecting the frequencies to be allocated has the advantage of preferentially confining the transmissions with the highest energy to the frequencies which are the least reused.

Such a procedure can clearly be applied irrespective
20 of the TRXm units, taking account simply of the frequency to be allocated.

Furthermore, the strategy of allocated channel selection can also be applied to the TDMA timeslots, and not only to the FDMA frequencies.

25 Figure 5 provides an illustration of this. The lower part shows the division into eight timeslots TS0-TS7 of the TDMA frame on a given carrier frequency, and the upper part diagrammatically shows the desired profile of the transmitted power PW over these timeslots.

30 In this example, the allocation procedure of the timeslot TS_i attempts to allocate the timeslots of even rank i to the communications of relatively high energy (mobile distant from the base station) and the timeslots of odd rank i to the communications of lower energy (close mobile). This type of allocation strategy, implemented in
35 an cluster of adjacent cells, allows for the average co-channel interference level to be reduced. If the base

stations are synchronised, it is possible to permute the role of the even-numbered and odd-numbered timeslots for an adjacent cell reusing the same frequency, whereby interference between the most energetic communications in the two cells can be avoided. In the case of asynchronous networks, the procedure reduces the average level of co-channel interference by limiting the average duration of transmission at high power.

In order to implement such a timeslot allocation procedure, the power level sensed by a mobile from the BTS or by the BTS from the mobile (or a combination of the two) is compared to a threshold S_{TS} , allowing a preferential allocation over an odd or even timeslot (as available). This threshold S_{TS} is advantageously defined with the aid of the distribution function of the associated measured quantity ($f(S_{TS}) = 50\%$ in the example under consideration).

It is noted that the statistics kept by the calculation module for each cell can be global with regard to the cell, or differentiated according to different sub-units or different sub-assemblies of resources used in the cell.

For example, in the case of the BTS 1 represented in Figure 3, the module may retain, on the one hand, a global statistic for the cell being served, and, on the other M similar statistics established respectively on the basis of the measurements made in relation to the mobiles assigned to the different transceiver units TRX1-TRX4. The global statistic serves to define the frequency choice thresholds S_1-S_3 as disclosed with reference to Figure 4, such that the M statistics relating to the transceiver units can be used to select the threshold S_{TS} called upon by the timeslot allocation procedure described with reference to Figure 5.

In the foregoing examples, the quantity which is subjected to the statistic maintained by the module 10 is deduced from the field strength measurements RXLEV, made

by the mobile stations or the base stations. It is possible to deduce these quantities from the other measurements reported in the message MEASUREMENT_RESULT (RXQUAL, DISTANCE, etc.). The quantity in question can also be a combination of one or more of these different measurements made in one or more directions of communication. Its precise choice depends on what was judged adequate for the optimisation of the procedure, whose parameters are adapted according to the invention.

In addition, the same radio resource management procedure can call upon statistics of different quantities maintained by the module 10. For example, certain intra-cell handover algorithms provide that, if a communication experiences a relatively high RXLEV and simultaneously a relatively low RXQUAL (good propagation but with the probable presence of an interferer on the same channel), the channel allocated to this communication can be modified. It is possible to envisage the corresponding thresholds on RXLEV and on RXQUAL to be defined with the aid of the distribution functions of these quantities calculated by the module 10.

An interesting quantity to be used in a number of radio resource management procedures is the channel-to-interferer ratio. If this ratio is available, it is possible advantageously to maintain a statistic thereof and to make use of it instead of the RXLEV quantities in each of the procedures described heretofore.

The channel-to-interferer ratio is not directly measurable, or only with great difficulty. In the uplink, the base station can evaluate it by various known techniques of analysis of the received radio signal. In the downlink, an evaluation scheme based on a comparison between the reception level by the mobile station of a signal transmitted by the base station and the reception levels by the same mobile station of signals transmitted on the beacon frequencies by the base stations of a group of adjacent cells, has been proposed in French Patent Application 97 11467.

In this scheme, the downlink channel-to-interferer ratio CIR is evaluated by the ratio between the downlink sensed power level, represented by RXLEV_DL, and the sum of the power levels measured from the adjacent cells, represented by RXLEV_NCELL(n). The measurement RXLEV_DL must be corrected, if appropriate, in order to take account of the power control. In the present case, since the statistics relate to the first measurements acquired on the SDCCH channel for which no power control is applied, this correction is not useful.

The evaluation of the channel-to-interferer ratio CIR can be effected by the module 10 on the basis of the measurements received in the message MEASUREMENT_RESULT, which contains at most six RXLEV_NCELL(n) measurements relating to the six beacon frequencies received with the highest energy by the mobile from adjacent cells, among a list of frequencies to be monitored which the BTS 1 signals to the mobiles on the BCCH channel:

$$CIR = \frac{P_{DL}}{\sum_{n=1}^6 g(n) \times P_{NCELL}(n)} \quad (2)$$

where the powers are given by $P_{DL} = 10^{RXLEV_DL/10}$ and $P_{NCELL}(n) = 10^{RXLEV_NCELL(n)/10}$, and $g(n)$ is a weighting coefficient dependant on the colours of the adjacent cells in the reuse pattern of the traffic channels. If the adjacent cell n is of the same colour as the serving cell of the mobile, then $g(n) = 1$. Otherwise, the coefficient $g(n)$ takes account of the protection of the adjacent channels, which is at least 18 dB in GSM, i.e. $g(n) = 0.016$.

This CIR estimate is characteristic of the radio-electric position of the mobile and represents the real behaviour of the network when loaded. The CIR estimate is the more reliable, the smaller the reuse pattern becomes, and the greater the load. In order to take account of this, it is possible to provide that the module 10 only evaluates the statistic of the CIR quantity in the

circumstances in which the network is locally loaded, e.g. at peak time.

The graphs in Figures 6 and 7 show the results of simulations carried out to assess the gain obtained by the method according to the invention. In the example simulated, the cellular network of the GSM type uses base stations with omni-directional antennae without power control, with a traffic load of 70%, and a reuse pattern of 3 cells for the traffic channels and 12 cells for the BCCH channels (four carriers per cell). The reference curves A correspond to the case where the carriers are randomly allocated, the invention not being applied. For the other curves B,C,D, the allocation of the frequency channels was such that 25% of the communications for which the conditions were worst were effected for preference on the BCCH frequency (reused in a pattern of 12), the others being randomly allocated a channel on another carrier (reused in a pattern of 3). The curves show the dependency between the ratio E_b/N_0 (energy per bit over noise power) and the binary error rate BER, in the uplink for Figure 6 and in the downlink for Figure 7.

The curves B correspond to the case where the quantity used to decide on the frequency to be allocated, and of which the statistic serves to define the corresponding threshold S_1 , is the power level $RXLEV_UL$. For the curves C, this quantity is the signal-to-interferer ratio CIR, evaluated on the downlink according to formula (2). For the curves D, it is the distance evaluated by the BTS on the basis of the uplink reception delay with respect to the downlink signal. The substantial gains may be noted which are achieved by the implementation of the invention. These gains are not identical in both communication directions, and depend on the quantities used, which allows for different optimisation strategies to be used depending on the particular features of the network.

CLAIMS

1. A method of selecting the value of at least one radio resource management parameter ($S_{PC}, S_{HO}, S_1, S_2, S_3, S_{TS}$) employed by base station control units (4) of a cellular
5 radio communications network, wherein, for each base station (1) serving mobile stations (3) in a cell, values are obtained of at least one quantity (RXLEV, RXQUAL, DISTANCE, CIR) based on measurements made on radio channels in the cell, said quantity being compared to at
10 least one associated parameter in a procedure for managing the radio resources allocated to the mobile stations, characterised in that a statistic is maintained of the values obtained for said quantity, and in that the value of said associated parameter is adapted for the cell in
15 such a way that, according to the statistic, a determined fraction of the values obtained of said quantity are greater than the value of the associated parameter.

2. A method according to Claim 1, wherein said measurements on radio channels in the cell comprise
20 measurements of the reception level (RXLEV) of radio signals transmitted in at least one direction between the base station (1) and mobile stations (3).

3. A method according to any one of the preceding claims, wherein said measurements made on radio channels
25 in the cell comprise quality measurements (RXQUAL) of the reception of radio signals transmitted in at least one direction between the base station (1) and mobile stations (3).

4. A method according to any one of the preceding
30 claims, wherein the obtaining of said quantity comprises estimating a channel-to-interferer ratio (CIR) at the base station (1) or at each mobile station (3).

5. A method according to any one of the preceding claims, wherein said measurements are made by the mobile

stations (3).

6. A method according to Claims 4 and 5, wherein the estimation of a channel-to-interferer ratio (CIR) at a mobile station comprises a comparison between the reception level (RXLEV DL), by the mobile station (3), of a signal transmitted by the base station (1) and the reception levels (RXLEV NCELL(n)), by the same mobile station, of signals transmitted on beacon frequencies by the base stations of a set of adjacent cells.

7. A method according to Claim 6, wherein said quantity (CIR) is the ratio between the level of reception (RXLEV DL) of said signal transmitted by the base station (1) and a sum of the reception levels (RXLEV NCELL(n)) of the signals transmitted on the beacon frequencies by the base stations of the adjacent cells.

8. A method according to Claim 7, wherein said sum is weighted as a function of colours of the adjacent cells in frequency reuse patterns of the network.

9. A method according to any one of Claims 1 to 4, wherein said measurements made on radio channels in the cell comprise measurements of a reception delay, by the base station (1), of signals transmitted by mobile stations (3).

10. A method according to any one of the preceding claims, wherein the statistic of the values obtained of said quantity (RXLEV, RXQUAL, DISTANCE, CIR) is based on first measurements obtained on a dedicated signalling channel (SDCCH) for each mobile station (3) spontaneously accessing the cell.

11. A method according to any one of the preceding claims, wherein said quantity is compared with an associated parameter (S_{PC}) in a control procedure of the power transmitted on radio channels allocated to

communications between the base station (1) and mobile stations (3).

12. A method according to Claim 11, wherein the power control procedure is such that only the mobile stations
5 for which the value obtained of said quantity is greater than the selected value of a first associated parameter (S_{PC}) can be subjected to power limitation, and wherein said determined fraction is of 10 to 20 % for the adaptation of the first parameter (S_{PC}).

10 13. A method according to Claim 12, wherein said quantity is further compared to a second associated parameter (S_{HO}) in an inter-cell handover procedure, wherein the handover procedure is such that the mobile stations (3) for which the value obtained of said quantity
15 is greater than the selected value of the second associated parameter are subjected to inter-cell handover, and wherein said determined fraction is lower for the adaptation of the second parameter (S_{HO}) than for the adaptation of the first parameter (S_{PC}).

20 14. A method according to any one of the preceding claims, wherein said quantity is compared to at least one associated parameter (S_1 - S_3 , S_{TS}) in a selection procedure for radio channels allocated to communications between the base station and the mobile stations.

25 15. A method according to Claim 14, wherein the base station comprises a number M of transceiver units (TRX1-TRX4), one of which transmits on a beacon frequency, and wherein the radio channel selection procedure preferentially allocates channels on the beacon frequency
30 to the mobile stations (3) for which the values obtained for said quantity are lower than an associated parameter (S_1), the adaptation of which makes use of a determined fraction of the form $100/M$ %.

16. A method according to Claim 14, wherein the base station comprises a number M of transceiver units (TRX1-TRX4), and wherein the radio channel selection procedure distributes the channels allocated to the mobile stations
5 (3) based on comparisons between the values obtained of said quantity for said mobile stations and M-1 associated parameters (S_1 - S_3), the adaptation of which makes use of the respective determined fractions of the form $100 \times m/M \%$ for $1 \leq m \leq M-1$.

10 17. A method according to any one of the preceding claims, wherein said quantity is compared to an associated parameter (S_{HO}) in an inter-cell or intra-cell handover procedure.

18. A method according to any one of the preceding
15 claims, wherein the base station (1) comprises a plurality of transceiver units (TRX1-TRX4), and wherein the statistic for the values obtained for said quantity is maintained separately for each one of the transceiver units, in order to select independently the values of the
20 associated parameter (S_{TS}) for the different transceiver units, at least part of the radio resource management procedure being carried out for each one of the transceiver units.

19. A control unit for at least one base station (1)
25 of a cellular radio communications network, comprising means (6) for performing management procedures of radio resources allocated to communications between the base station and mobile stations (3) in a cell served by said base station, characterised by means (10,11) for
30 selecting, in accordance with a selection method according to any one of the preceding claims, the value of at least one parameter ($S_{PC}, S_{HO}, S_1, S_2, S_3, S_{TS}$) used in at least one of said procedures in which values of a quantity (RXLEV, RXQUAL, DISTANCE, CIR) obtained from measurements made in


the cell on radio channels between the base station and the mobile stations are compared with said parameter, the selection means (10,11) being arranged to maintain a statistic of the values obtained of said quantity, and to
5 adapt the value of said parameter in such a way that, based on the statistic, a determined fraction of the values obtained of said quantity are greater than the value of the associated parameter.

0
1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
220

ABSTRACT

For each base station (1) serving mobile stations in a cell, measurements carried out on radio channels in the cell are used to obtain values of a quantity compared to one or several associated parameters in a procedure managing radio resources allocated to the mobile stations. A statistic of the obtained values the quantity is maintained. The value of each associated parameter for the cell is adapted such that, according to the statistic, a predetermined fraction of the values of the quantity obtained from the measurements are higher than the associated parameter value.

FIG.1.

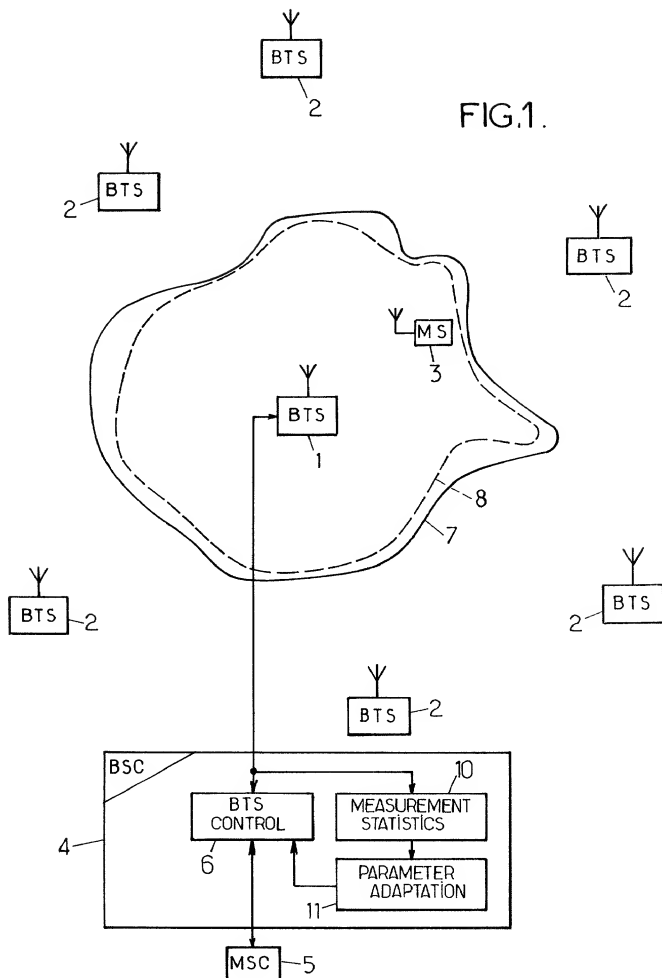

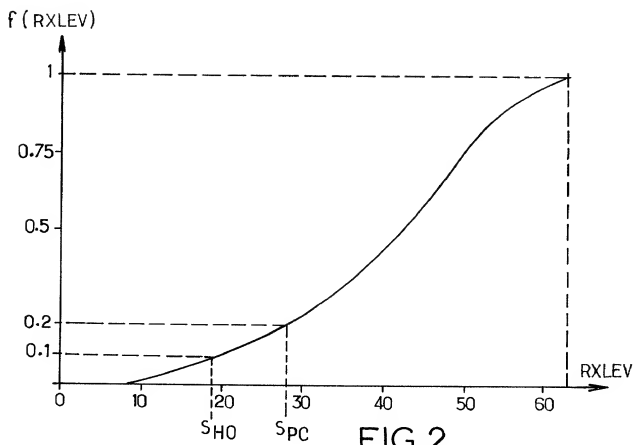


FIG.2.

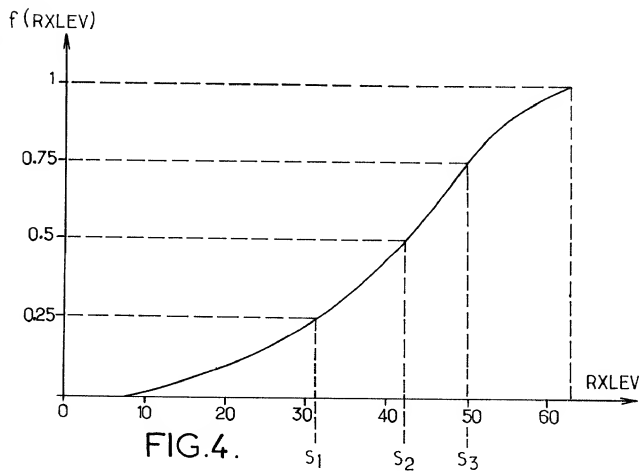


FIG.4.

FIG.3.

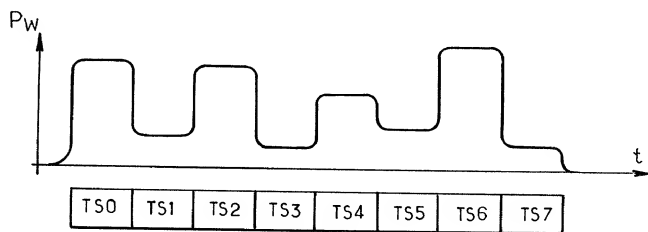
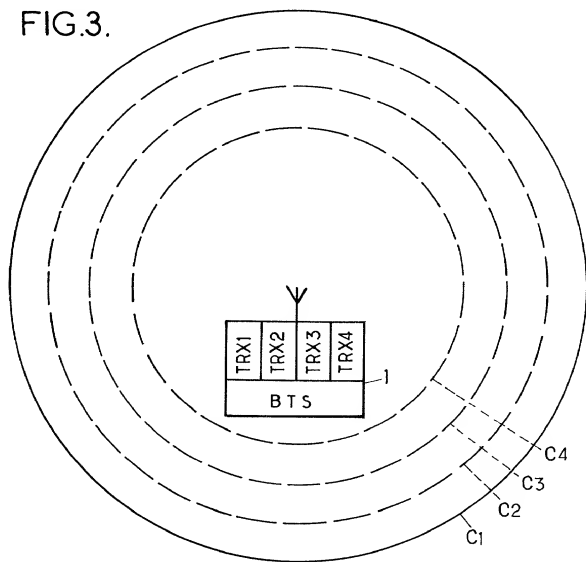


FIG.5.

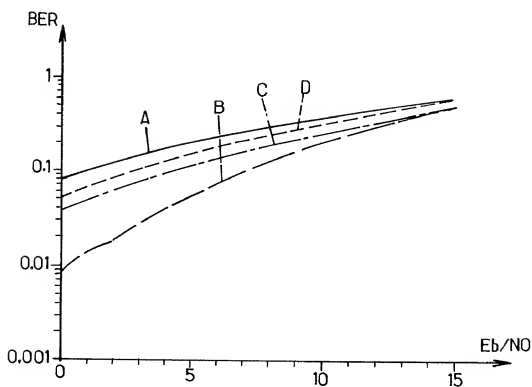


FIG. 6.

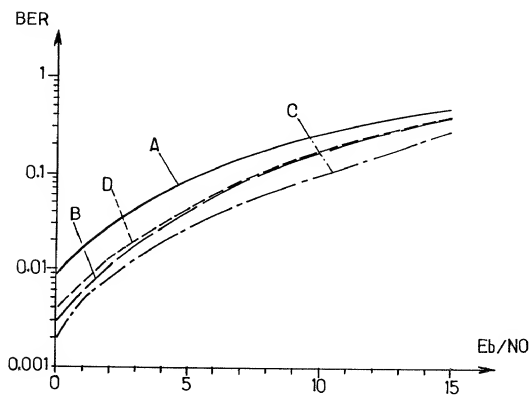


FIG. 7.

Docket No.

Declaration and Power of Attorney For Patent Application

English Language Declaration

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

METHOD AND APPARATUS FOR SELECTING PARAMETERS IN A CELLULAR RADIO COMMUNICATION NETWORK

the specification of which

(check one)

☒ is attached hereto.

☐ was filed on _____ as United States Application No. or PCT International Application Number _____ and was amended on _____ (if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119(a)-(d) or Section 365(b) of any foreign application(s) for patent or inventor's certificate, or Section 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate or PCT International application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s)

Priority Not Claimed

98 08150	FRANCE	26.06.98	<input type="checkbox"/>
(Number)	(Country)	(Day/Month/Year Filed)	
_____	_____	_____	<input type="checkbox"/>
(Number)	(Country)	(Day/Month/Year Filed)	
_____	_____	_____	<input type="checkbox"/>
(Number)	(Country)	(Day/Month/Year Filed)	

I hereby claim the benefit under 35 U.S.C. Section 119(e) of any United States provisional application(s) listed below:

(Application Serial No.)

(Filing Date)

(Application Serial No.)

(Filing Date)

(Application Serial No.)

(Filing Date)

I hereby claim the benefit under 35 U. S. C. Section 120 of any United States application(s), or Section 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. Section 112. I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, C. F. R., Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application:

PCTFR99/01505

23.06.99

(Application Serial No.)

(Filing Date)

(Status)
(patented, pending, abandoned)

(Application Serial No.)

(Filing Date)

(Status)
(patented, pending, abandoned)

(Application Serial No.)

(Filing Date)

(Status)
(patented, pending, abandoned)


I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (list name and registration number)

Michael L. Kenaga	<u>34,639</u>
William T. Rifkin	<u>26,501</u>
Mark I. Feldman	<u>26,380</u>
James P. Ryther	<u>20,424</u>
Mary Spalding Burns	<u>32,116</u>
R. Blake Johnston	<u>41,097</u>
Thomas W. Ryan	<u>43,072</u>
Tracey R. Thomas	<u>38,633</u>
David J. Richter	<u>26,221</u>

Send Correspondence to: Michael L. Kenaga
RUDNICK & WOLFE
P.O. Box 64807
Chicago, Illinois 60664-0807

Direct Telephone Calls to: (name and telephone number)
Michael L. Kenaga, (312) 368-8937

Full name of sole or first inventor	
<u>Thierry BILLON</u>	
Sole or first inventor's signature	Date
	<u>January 14th 2000</u>
Residence	
<u>9, rue des pavillons - 92800 PUTEAUX - FRANCE</u>	
Citizenship	
<u>French</u> <u>FRX</u>	
Post Office Address	
<u>Same as above</u>	

Full name of second inventor, if any	
Second inventor's signature	Date
Residence	
Citizenship	
Post Office Address	